

STARK AUDITORIUM SCOPE OF WORK NOTES

STAGE

- REMOVE 900 SF SHEETROCK CEILING ON STAGE
- CLEAN VENT ABOVE HVAC (NEAR DOUBLE DOOR ENTRANCE)

SIDE AREA

- REMOVE 9 2X2 ACOUSTICAL CEILING TILE (ACT)
- CLEAN CONCRETE WALL WITH WATER STAIN (300 SF)

AUDITORIUM SEATING AREA

- CLEAN 14 - 1X2 HEATING VENTS ALONG THE SIDES OF THE AUDITORIUM
- CLEAN 5 SPEAKERS ALONG THE SIDES AND REAR OF THE AUDITORIUM
- CLEAN 4 HEAT EXCHANGERS ALONG THE CEILING OF THE AUDITORIUM
- CLEAN 2 RETURNS ALONG THE CEILING OF THE AUDITORIUM

VESTIBULE


- REMOVE APPROXIMATELY 290 SF OF SHEETROCK FROM CEILING. AREA TO BE EXPOSED WOULD BE 8 FEET FROM WALL ALONG THE LENGTH OF THE CEILING
- REMOVE 3 LF OF CROWN MOLDING ALONG GREEN BRICK WALL AND OPEN 2X2 EXPLORATORY AREA WHERE WATER STAINING IS OBSERVED.

WOMENS BATHROOM


- REMOVE 2X4 PLASTER CEILING (NEAR DOOR)
- CLEAN 1 RETURN
- CLEAN 1 HEAT EXCHANGE

MENS ROOM

- REMOVE 1 2X4 ACT
- CLEAN 1 VENT
- CLEAN 1 HEAT EXCHANGE

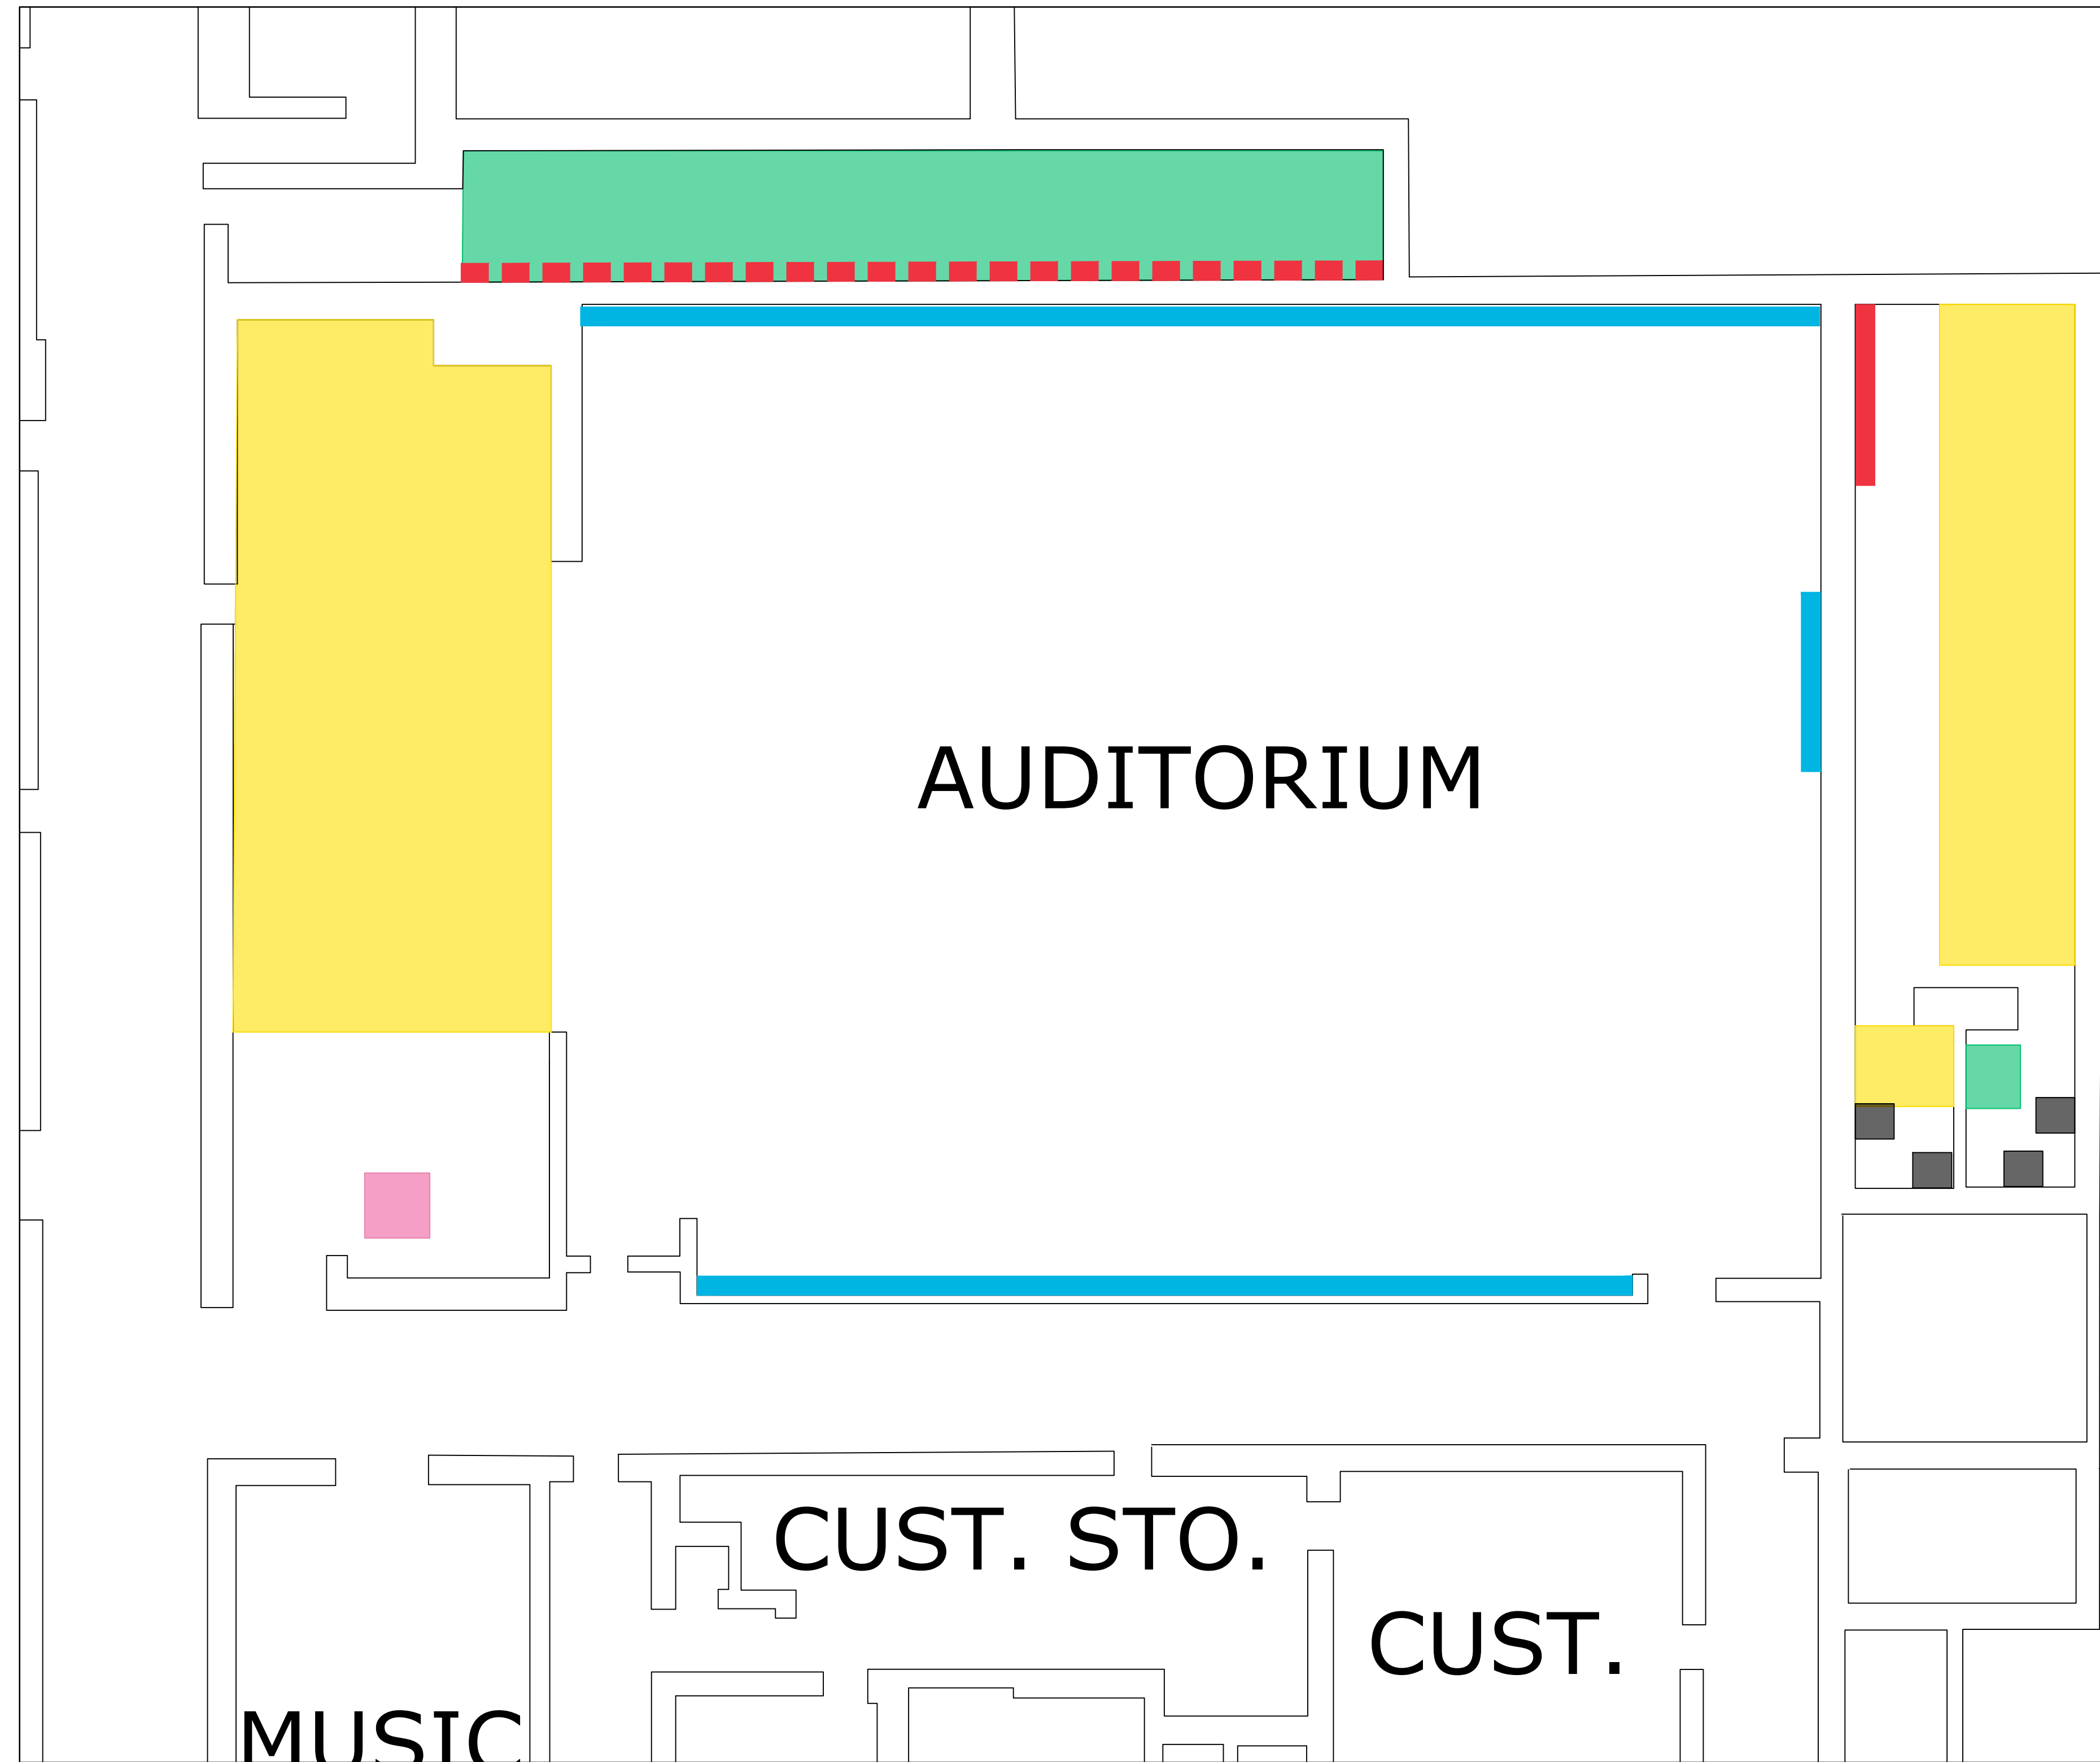

AREA SHOWN

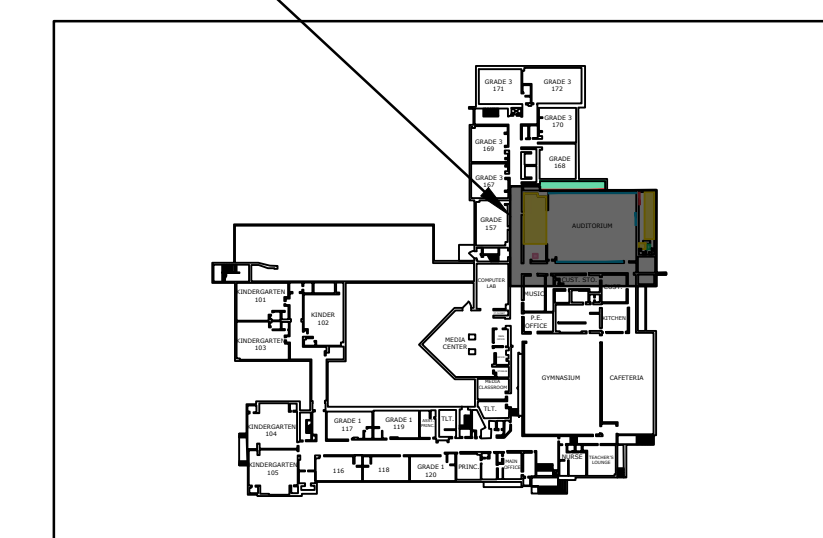

DRAFT

Stark Elementary School

City of Stamford

Stamford, CT

MARK	DATE	DESCRIPTION
	12/10/2018	REV.1
PROJECT NO: S2087		
DATE: 1/15/2019		
FILE: Stark Mold Remediation.dwg		
DRAWN BY: WAC		
CHECKED: XX		
APPROVED: XX		

Area 5

SCALE: NTS

Figure 3.2