








LEGEND



MEDIA CENTER
(Includes Main Office, Office 1, and Storage Room)

- Clean 15 air diffusers
- Clean 8 air returns
- Clean approximately 75 linear feet (LF) of heating system supply line within fan coil unit
- Remove/Replace at least 62 acoustic ceiling tiles


-  = Remove 1,700 square feet (SF) of vinyl wallpaper (Media Center)
-  = Remove 900 SF of vinyl wallpaper (Storage Closet)
-  = Remove 500 SF of vinyl wallpaper (Office 1)
-  = Remove 480 SF of vinyl wallpaper (Main Office)
-  = Remove 350 SF of vinyl wallpaper (IT Closet)
-  = Remove approximately 350 SF of gypsum board around window system of Media Center
-  = Remove approximately 150 SF of gypsum board adjacent to IT Closet



COMPUTER LAB

- Clean 5 air diffusers
- Clean 3 air returns
- Clean 40 LF of heating system supply line within fan coil unit
- Remove and replace at least 5 acoustic ceiling tiles

-  = Remove approximately 900 SF of vinyl wallpaper
-  = Remove approximately 210 SF of gypsum board around window system

DRAFT - NOT FOR CONSTRUCTION

AREA SHOWN 

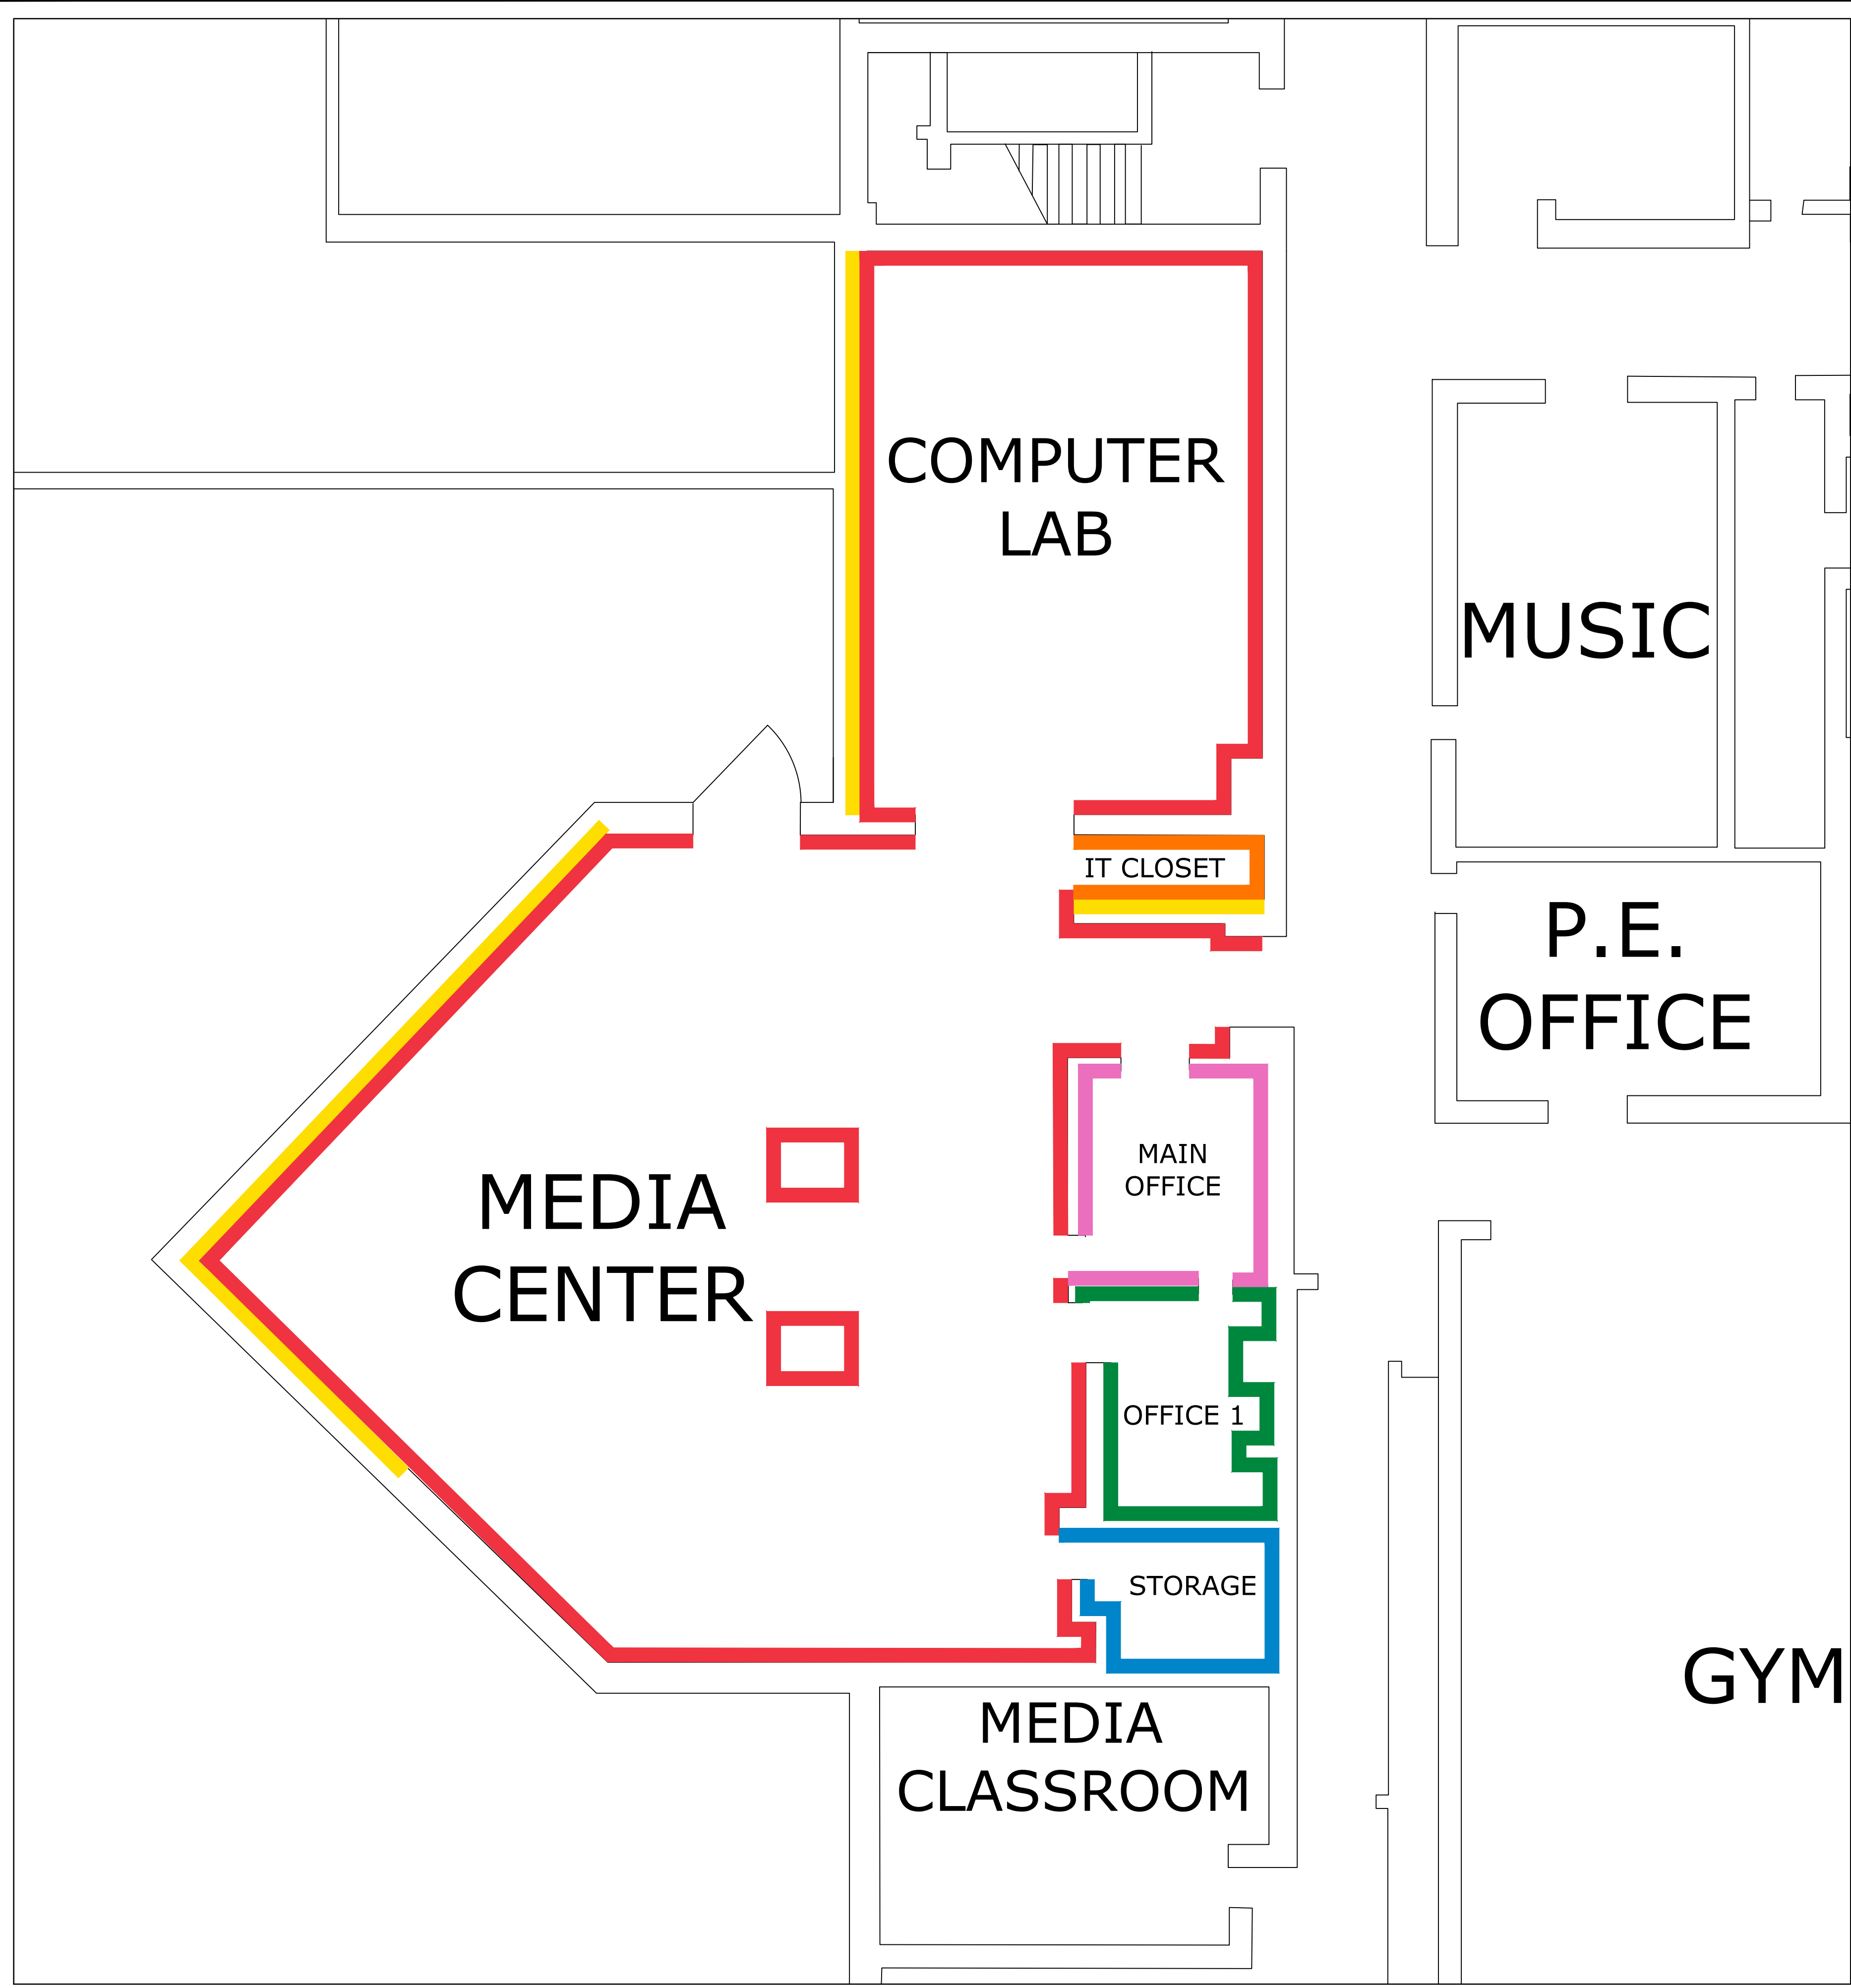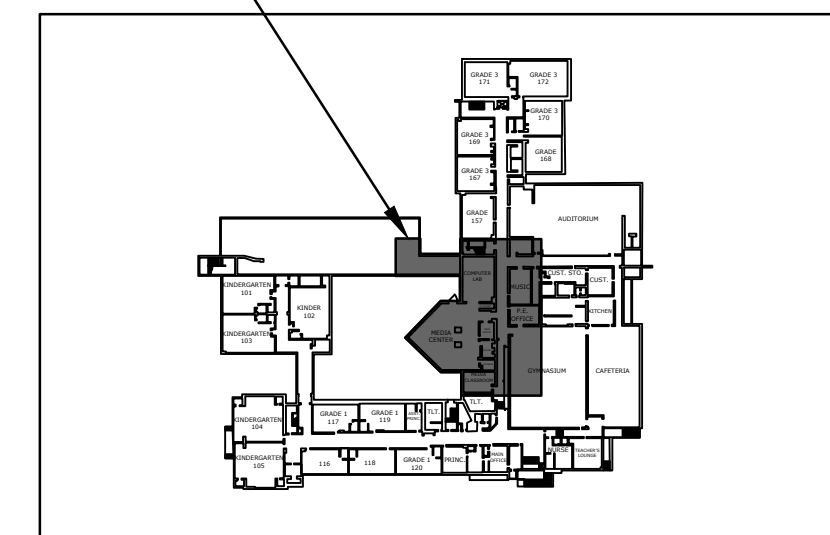

FIRST FLOOR

Stark Elementary School

City of Stamford

Stamford, CT

MARK	DATE	DESCRIPTION
	12/10/2018	REV.1
PROJECT NO: S2087		
DATE: 1/7/2019		
FILE: Stark Mold Remediation.dwg		
DRAWN BY: WAC		
CHECKED BY: XX		
APPROVED BY: XX		

Area 4

SCALE: NTS

Figure 3